


TIMER MODE

Switch 1	10	SEC/10c
Switch 2	20	SEC/10c
Switch 3	40	SEC/10c
Switch 4	80	SEC/10c
Switch 5	160	SEC/10c
Switch 6	320	SEC/10c
Switch 7	640	SEC/10c
Switch 8	OFF FOR TIMER	

TOKEN = £1

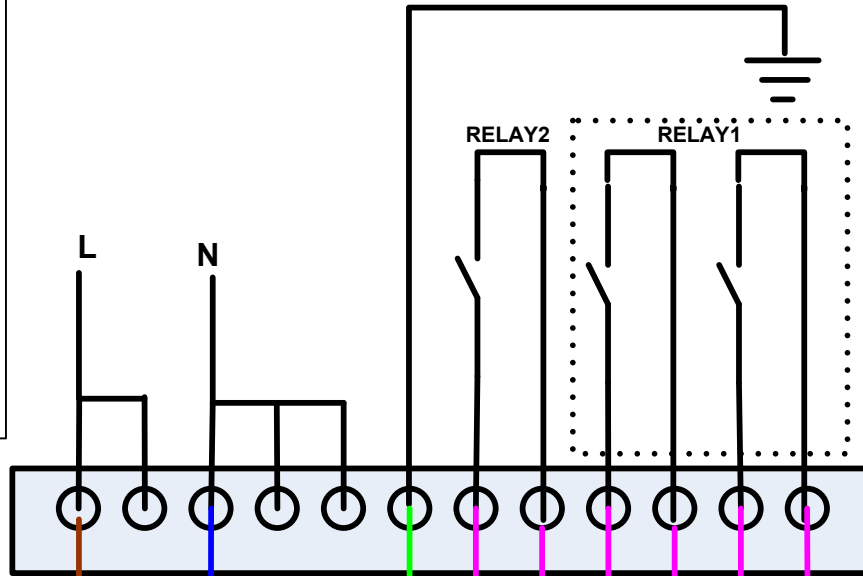

ALL THREE CONTACTS SWITCH ON TOGETHER. CIRCUIT 3 SWITCHES OFF FOR THE LAST 3 MINUTES OF THE TIME BOUGHT.

FOR NORMAL TIMER OPERATION USE ONLY THE CIRCUIT 1 AND CIRCUIT 2 CONTACTS.

CONTACTS 7A MAX

230V 50Hz
PERMANENT SUPPLY
FROM 3A FUSED SPUR.

CIRCUIT 1 TIMER OUTPUT

CIRCUIT 2 TIMER OUTPUT

CIRCUIT 3 TIMER OUTPUT
OPENS WHEN LESS THAN
3 MINUTES REMAIN. MAY
BE USED FOR COOLDOWN
OR ALARM IF REQUIRED.